


# API 5L X65 PSL2 Pipe Wall Thickness Chart

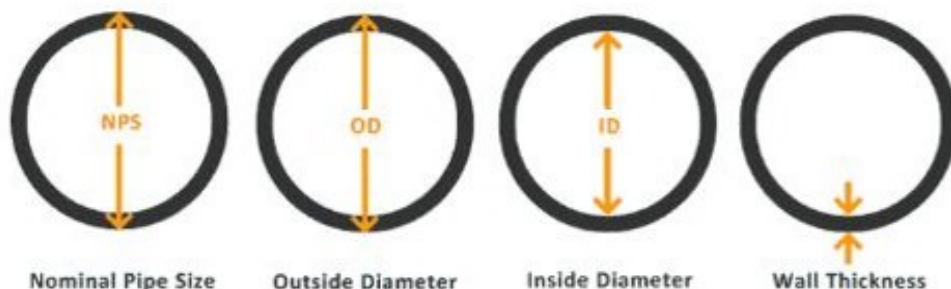

| NOMINAL Pipe Size |        | OUTSIDE DIAMETER | NOMINAL WALL THICKNESS |       |       |       |       |       |       |       |       |         |         |         |         |
|-------------------|--------|------------------|------------------------|-------|-------|-------|-------|-------|-------|-------|-------|---------|---------|---------|---------|
| DN                | OD     |                  | ASME                   | SCH10 | SCH20 | SCH30 | STD   | SCH40 | SCH60 | X5    | SCH80 | SCH 100 | SCH 120 | SCH 140 | SCH 160 |
| 15                | 1/2"   | 21.3             | 2.11                   |       | 2.41  | 2.77  | 2.77  |       | 3.73  | 3.73  |       |         |         | 4.78    | 7.47    |
| 20                | 3/4"   | 26.7             | 2.11                   |       | 2.41  | 2.87  | 2.87  |       | 3.91  | 3.91  |       |         |         | 5.56    | 7.82    |
| 25                | 1"     | 33.4             | 2.77                   |       | 2.9   | 3.38  | 3.38  |       | 4.55  | 4.55  |       |         |         | 6.35    | 9.09    |
| 32                | 1-1/4" | 42.2             | 2.77                   |       | 2.97  | 3.56  | 3.56  |       | 4.85  | 4.85  |       |         |         | 6.35    | 9.7     |
| 40                | 1-1/2" | 48.3             | 2.77                   |       | 3.128 | 3.68  | 3.68  |       | 5.08  | 5.08  |       |         |         | 7.14    | 10.15   |
| 50                | 2"     | 60.3             | 2.77                   |       | 3.18  | 3.91  | 3.91  |       | 5.54  | 5.54  |       |         |         | 8.74    | 11.07   |
| 65                | 2-1/2" | 73               | 3.05                   |       | 4.78  | 5.16  | 5.16  |       | 7.01  | 7.01  |       |         |         | 9.53    | 14.02   |
| 80                | 3"     | 88.9             | 3.05                   |       | 4.78  | 5.49  | 5.49  |       | 7.62  | 7.62  |       |         |         | 11.13   | 15.25   |
| 90                | 3-1/2" | 101.6            | 3.05                   |       | 4.78  | 5.74  | 5.74  |       | 8.08  | 8.08  |       |         |         |         |         |
| 100               | 4"     | 114.3            | 3.05                   |       | 4.78  | 6.02  | 6.02  |       | 8.56  | 8.56  |       | 11.3    |         | 13.49   | 17.12   |
| 125               | 5"     | 141.3            | 3.4                    |       |       | 6.55  | 6.55  |       | 9.53  | 9.53  |       | 12.7    |         | 15.88   | 19.05   |
| 150               | 6"     | 168.3            | 3.4                    |       |       | 7.11  | 7.11  |       | 10.97 | 10.97 |       | 14.27   |         | 18.26   | 21.95   |
| 200               | 7"     | 219.1            | 3.76                   |       | 7.04  | 8.18  | 8.18  | 10.31 | 12.7  | 12.7  | 15.09 | 18.26   | 20.62   | 23.01   | 22.23   |
| 250               | 8"     | 273              | 3.76                   | 6.35  | 7.8   | 9.27  | 9.27  | 12.7  | 12.7  | 15.09 | 18.26 | 21.44   | 25.4    | 28.58   | 25.4    |
| 300               | 10"    | 232.8            | 4.19                   | 6.35  | 8.38  | 9.53  | 10.31 | 14.27 | 12.7  | 17.48 | 21.44 | 25.4    | 28.58   | 33.32   | 25.4    |
| 350               | 12"    | 355.6            | 4.57                   | 6.35  | 9.53  | 9.53  | 11.13 | 15.09 | 12.7  | 19.05 | 23.83 | 27.79   | 31.75   | 35.71   |         |
| 400               | 14"    | 406.4            | 6.35                   | 7.92  | 9.53  | 9.53  | 12.7  | 16.66 | 12.7  | 21.44 | 26.19 | 30.96   | 36.53   | 40.19   |         |
| 450               | 16"    | 457.2            | 6.35                   | 7.92  | 11.13 | 9.53  | 14.27 | 19.05 | 12.7  | 23.83 | 29.36 | 34.93   | 39.67   | 45.24   |         |
| 500               | 20"    | 508              | 6.35                   | 9.53  | 12.7  | 9.53  | 15.09 | 20.62 | 12.7  | 26.19 | 32.54 | 38.1    | 44.45   | 50.01   |         |
| 550               | 22"    | 558.8            | 6.35                   | 9.53  | 12.7  | 9.53  |       | 22.23 | 12.7  | 28.58 | 34.93 | 41.28   | 47.63   | 53.98   |         |
| 600               | 24"    | 609.6            | 6.35                   | 9.53  | 14.7  | 9.53  | 17.48 | 24.61 | 12.7  | 30.96 | 38.89 | 46.02   | 52.37   | 59.54   |         |
| 650               | 26"    | 660.4            | 7.92                   | 12.7  |       | 9.53  |       |       | 12.7  |       |       |         |         |         |         |
| 700               | 28"    | 711.2            | 7.92                   | 12.7  | 15.88 | 9.53  |       |       | 12.7  |       |       |         |         |         |         |
| 750               | 30"    | 762              | 7.92                   | 12.7  | 15.88 | 9.53  |       |       | 12.7  |       |       |         |         |         |         |